

eTOP510G

The eTOP Series 500G HMI products combine state-of-the-art features and top performance with an outstanding design. They are the ideal choice for all demanding HMI applications including factory, energy and marine applications.

The eTOP510G features a high-brightness, contrast-enhanced ruggedized 10.1" TFT widescreen display with LED backlight. The product has been designed for use in harsh environments and outdoor applications. Glass bonding assembly and glass surface treatment provide for superior optical performance resulting in a sunlight-readable product. The durable glass touchscreen requires the human touch, eliminating false activations, and offers high reliability and durability; it will continue to work even when surface is scratched or contaminated.



- 10.1" TFT color display, resolution 1280x800 pixel, 64K colors
- LED backlight dimmable to 0%
- Projected capacitive touchscreen. True glass design
- 2 Ethernet ports with switch function
- 2 USB Host ports
- SD Card slot
- Plug-in modules for system expansion

Highlights


The eTOP Series 500G HMI panels have been designed to run the JMobile software.

- JMobile runtime included. Full compatibility with JMobile Studio.
- Full vector graphic support. Native support of SVG graphic objects. Transparency and alpha blending.
- Full object dynamics: control visibility and transparency, move, resize, rotate objects on screen. Change properties of basic and complex objects.
- TrueType fonts
- Multilanguage applications. Easily create and manage your applications in multiple languages to meet global requirements.
- Rich set of state-of-the-art HMI features: graphical presentation of data presentation, data acquisition, alarm handling, scheduler and timed actions, recipe data storage, users and passwords, e-mail and RSS feeds, rotating menus.
- Indexed addressing and cross-reference viewer.
- Wide selection of communication drivers for factory and building automation.
- Multiple drivers communication capability.
- Remote monitoring and control. Client-Server functionality. Mobile clients supported.
- Remote maintenance and support with VNC-based functionality.
- Off-line and on-line simulation of the HMI application with JMobile Studio.
- Powerful scripting language for automating HMI applications. Includes script debugger.
- Create and print reports to printers and to file.
- Page templates to simplify application design.
- Rich gallery of symbols and objects.
- Includes PDF reader.
- MediaPlayer widget
- IP Network camera widget
- Optional CODESYS PLC


Technical Data

Display Type Resolution Active display area Colors Backlight Brightness Dimming	TFT 1280x800, WXGA 10.1" diagonal 64K LED 600 Cd/m ² typ. Dimmable to 0%	Battery	Rechargeable Lithium battery, not user-replaceable
System Resources Operating System User memory RAM	Microsoft Windows CE 6.0 256 MB Flash 256MB DDR	Environmental Conditions Operating temperature Storage temperature Operating and storage humidity Protection class	-20° to +60 °C (vertical installation) -20 to +70 °C 5 – 85 % relative humidity, non-condensing Front IP66 (IP69K) Rear IP20
Operator Interface Touchscreen LED indicators	Projected capacitive -	Dimensions Faceplate LxH Cutout AxB Depth D+T	282x197 mm (11.10x7.80") 271x186 mm (10.67x7.32") 56+8 mm (2.20+0.33")
Interface Ethernet USB Serial Memory Card Expansion	2 10/100 Mbit with integrated Switch 2 Host Interface Interface (1x version 2.0, 1x version 2.0 and 1.1) RS-232, RS-485, RS-422, software configurable. Max 3 serial ports with optional plug-in modules. SD Card slot 2 slots for optional plug-in modules	Approvals CE DNV ATEX IECEx UL RCM	Emission EN 61000-6-4 Immunity EN 61000-6-2 for installation in industrial environments DNV Type Approval Certificate Zone 2/22 II 3G Ex nA IIC T4 Gc -20<Tamb<+60°C II 3D Ex tc IIIC T105°C Dc Zone 2/22 Ex nA IIC T4 Gc -20<Tamb<+60°C Ex tc IIIC T105°C Dc UL508 Listed Haz. Loc. Class I, Division 2, Groups A,B,C and D. RCM mark
Functionality Hardware Real Time Clock Screen saver Buzzer	Yes, with battery back-up Yes Yes, audible feedback for touchscreen		
Ratings Power supply voltage Current consumption Fuse Weight	24 Vdc (10 to 32 Vdc) 1.0 A at 24Vdc(max.) Automatic Approx 1.7 Kg		

Dimensions

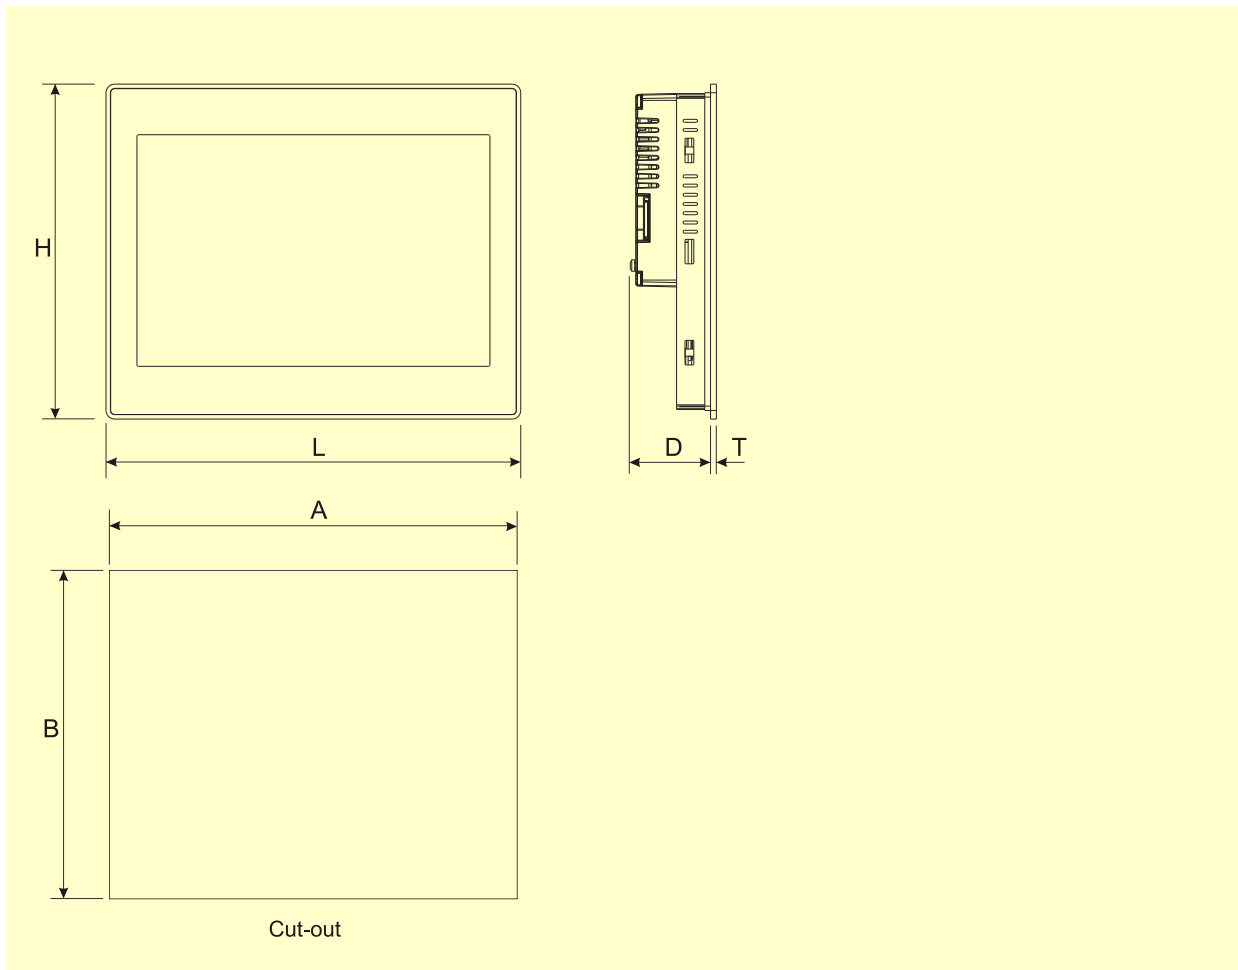

Connections

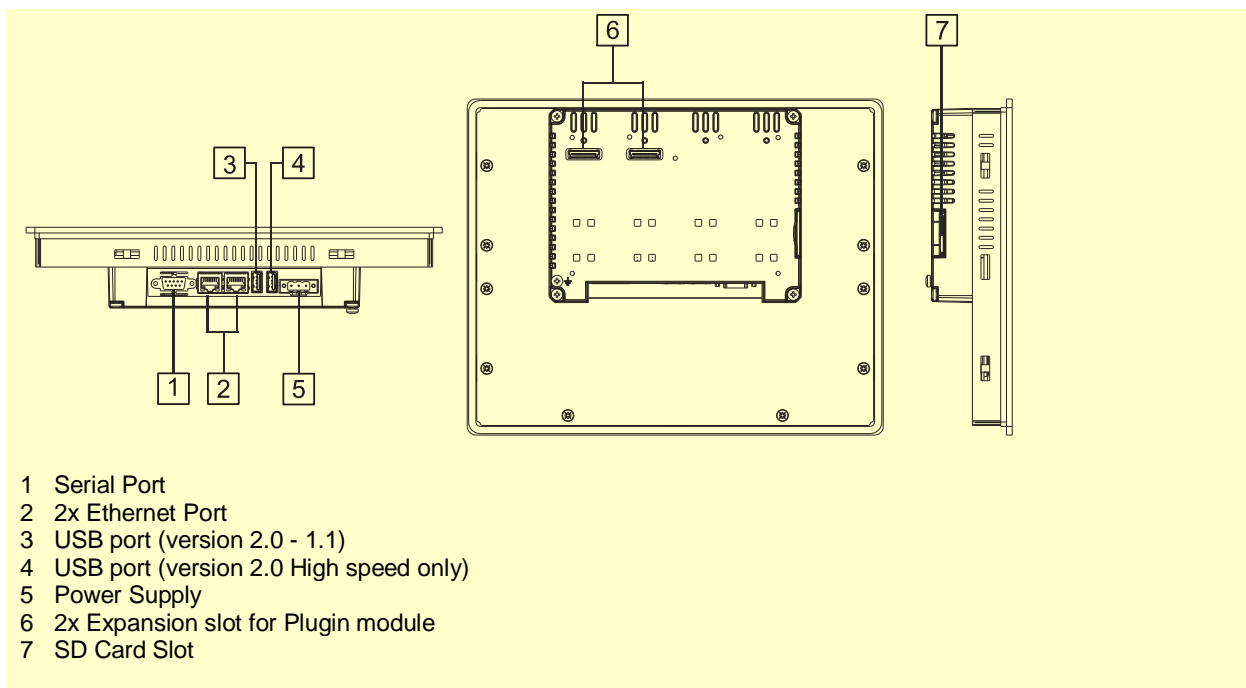

Ordering Information

Model	Part Number	Description
eTOP510G	+ETOP510U5P1	10.1" widescreen TFT color with projected capacitive touchscreen. Ethernet and USB interfaces. JMobile runtime.

ptn0470

Ver. 1.3

Copyright © 2014, 2016 Exor International S.p.A. – Verona, Italy

Subject to change without notice

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

www.exorint.net